

LIQUID SOAP DISPENSER



SOAP DISPENSER 6322

- Plastic globe - 1 litre capacity
- Lavatory mounted
- Top filled
- Spout length 64mm
- Spout length options:
 - 6324: 102mm spout
 - 6326: 152mm spout
 - 6321: wall mounted nozzles - 20mm spout

CONSTRUCTION:

PLUNGER AND SPOUT:	Fabricated of type 304 stainless steel.
ESCUTCHEON:	Manufactured of heavy chrome plated brass.
SHANK:	Manufactured of molded ABS plastic.
VALVE CYLINDER:	Manufactured of molded ABS plastic.
VALVE COMPONENTS:	Manufactured of Clecon, Buna-N rubber or stainless steel.
PLASTIC GLOBE:	Manufactured of translucent polyethylene.

CAPACITY:

1 Litre. We recommend Bradley model PB609 liquid soap for optimum operation and performance.

OPERATION:

Depress piston for measured amount of liquid soap. Fills from top by unlocking and withdrawing piston and spout assembly using special key provided. The 6322 will work best with Bradley Model PB609 formula liquid soap. Spout is fixed.

INSTALLATION:



Mount dispenser in 25mm diameter hole in lavatory or counter-top. Include dispenser mounting hole location in washroom specifications or mount in unused faucet hole. Shank will accommodate a maximum of 36mm mounting thickness and can be cut in the field.

GUIDE SPECIFICATION:

Lavatory mounted liquid soap dispenser manufactured of type 304 stainless steel, chrome plated brass and molded ABS plastic. Buna-N O-ring seals and duckbills. Valve shall dispense measured amount of Bradley Model PB609 formula liquid soap. Servicing facilitated by use of special wrench.

MODEL 6322

Options:
6322-69 Small Half Litre Bottle

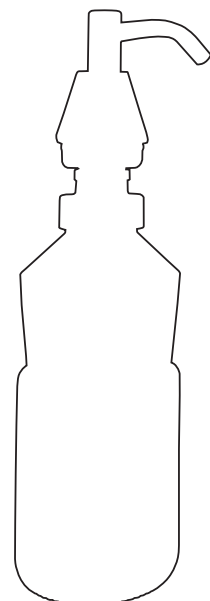

TOLL FREE 1300 364 561

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation.

Bradley
AUSTRALIA.COM